




Silent, reliable and easy to use

SIMPLICITY AND COMPLETENESS


The glass and dishwashers of the DWASH series are ideal for bars, pubs, restaurants and hotels.

These under-counter beautifully designed machines with a newly re-designed control panel, feature a wide loading capacity granting the highest performance at a reasonable price.

According to the user's needs the machine can be customized thanks to many optional features such as water softener, detergent dispenser and drain pump.

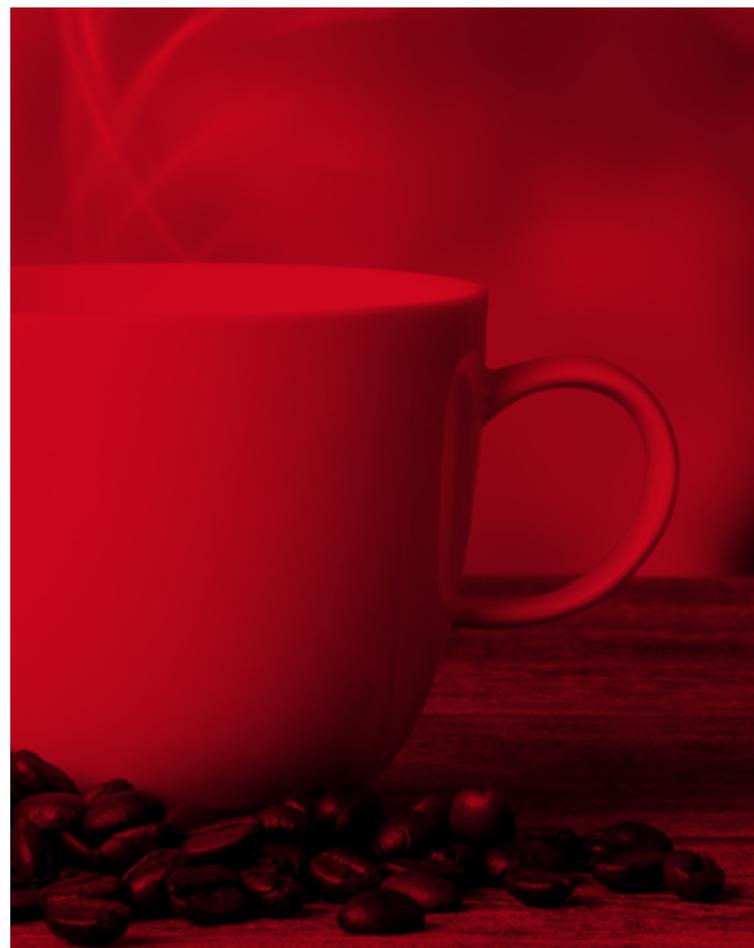


DWASH 35

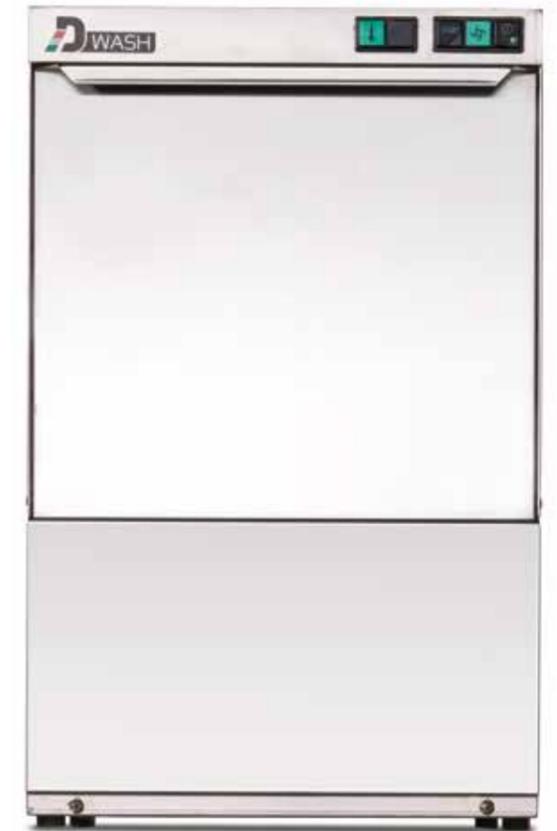

DWASH 40

- AISI 304 structure
- Sound and heat proof door
- Double skin door with security microswitch
- Deep-drawn and inclined tank for a perfect total drain
- Overflow and drain pipes integrated system, for a triple protection of the washing pump
- Anti dropping roof to safeguard the hygiene of the freshly washed dishes

- Light wash and rinse arms, granting the best efficiency also when the water pressure is weaker
- Easy to remove nozzles, to help with daily cleaning operations
- Back flow prevention valve
- Rinse-aid dispenser
- Thermostop system: the rinse starts only when the water in boiler reaches 85°C

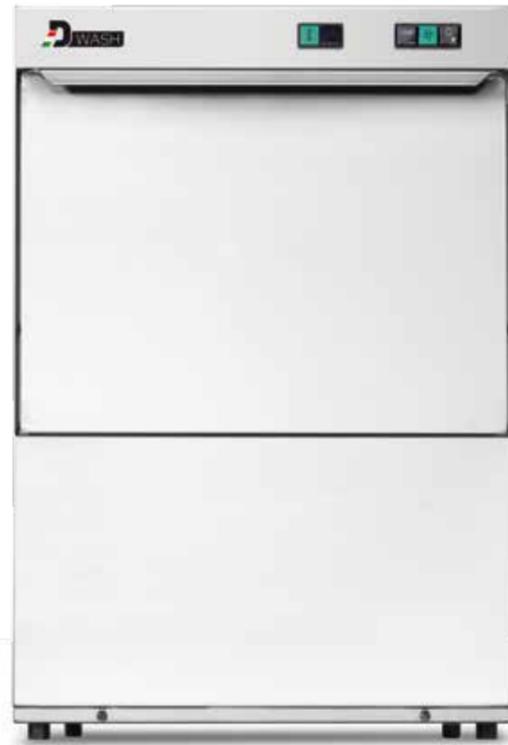

DWASH 50

- A further upper surface filter
- Door security
- Built-in rinse-aid pump
- AISI 304 structure
- Sound and heat proof door
- Double skin door with security microswitch
- Deep-drawn and inclined tank for a perfect total drain
- Overflow and drain pipes integrated system, for a triple protection of the washing pump
- Anti dropping roof to safeguard the hygiene of the freshly washed dishes
- Light wash and rinse arms, granting the best efficiency also when the water pressure is weaker
- Easy to remove nozzles, to help with daily cleaning operations
- Back flow prevention valve
- Rinse-aid dispenser (peristaltic version on demand)
- Thermostop system: the rinse starts only when the water in boiler reaches 85°C




DWASH 100

- One wash cycle
- Hood operating start/stop functions
- Deep-formed tank
- Built-in rinse-aid pump
- Tank and boiler thermometres
- A further upper surface filter
- Linear or angular layouts
- Easily removable basket support
- Light wash and rinse arms, granting the best efficiency also when the water pressure is weaker
- Double tank filter + pump filter

CARE FOR OUR CUSTOMER

Our aim is to reduce consumptions in terms of energy, water and chemical products, therefore granting the final user a global savings, but also less pollution and waste of natural resources.

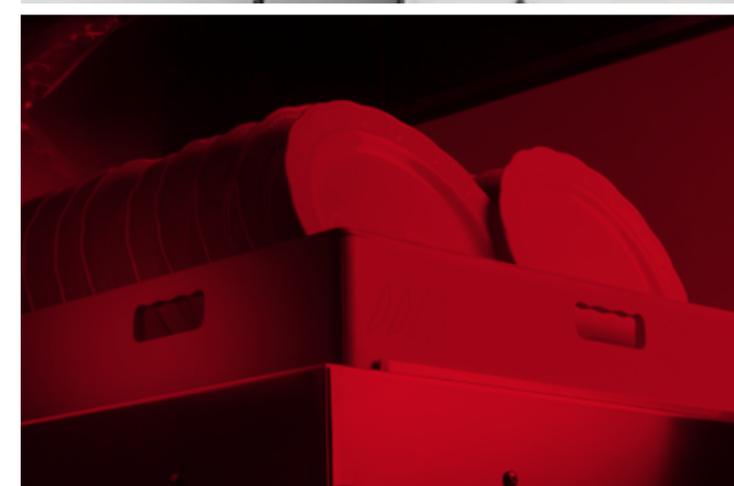

FEATURES



		DWASH 35	DWASH 40	DWASH 50	DWASH 100
Racks/hour	nr	30	30	30	40
Washing cycles	sec.	120	120	120	90
Power supply		230V - 50Hz	230V - 50Hz	230V - 50Hz	400V 3N - 50Hz
Washing pump	W	190	190	400	550
Boiler heating element	W	2400	2400	2800	6000
Tank heating element	W	1850	1850	1850	2700
Total input	W	2590	2590	3200	6550
Tank capacity	lt	9,5	14,5	29	30
Boiler capacity	lt	2,5	3,4	5,7	5,7
Water consumption	lt	1,4	1,8	2,3	2,8
Basket size	mm	350 x 350	400 x 400	500 X 500	500 x 500
Glass max height	mm	195	305	320	355
Dishes max height	mm	-	-	345	410
Tray max height	mm	-	-	-	 530 x 325
Hydric pressure	kPa	200 ÷ 400	200 ÷ 400	200 ÷ 400	200 ÷ 400
Size	mm	400 x 495 x H 585 28 kg	450 x 535 x H 700 37 kg	590 x 600 x H 850 56,5 kg	720 x 735 x H 1445/1880 100 kg

NOTE



Mittal International

7, Netaji Subhash Marg, Darya Ganj,
New Delhi-110002
Tel: 23271810, 23279639, 23278741,
23242500-1-2-3
Fax : 011-23271218
mitalin@vsnl.com
sales@mitalin.com



Dihir Ali Spa
Via del Lavoro, 28
I - 31033 Castelfranco Veneto (TV)

