



There's only one #1™

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_


## Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature. Ideal for pass-through areas, buffet lines or as a heated work shelf.

### Standard features

- Uniform heat distribution with blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm)
- Extruded aluminum base with stainless steel top (optional hardcoated aluminum surface)
- Standard Legs:
  - Units 30" (762 mm) wide and under: 1" (25 mm) legs
  - Units 36" (914 mm) or wider: 4" (102 mm) legs
- All models include a 72" (1829 mm) cord and plug attached
- Glo-Ray® Blanket Heating Elements warranted against burnout for one year

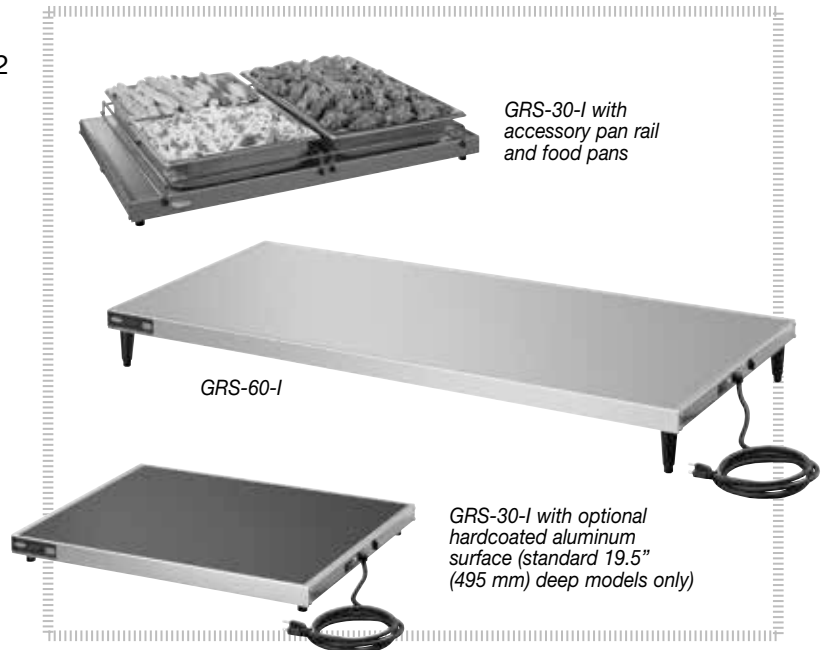

### Options (available at time of purchase only)

Designer Color† (top surface not painted) – Clear Anodized standard

- |                                    |                                       |   |  |
|------------------------------------|---------------------------------------|---|--|
| <input type="checkbox"/> Warm Red  | <input type="checkbox"/> Black        | <input type="checkbox"/> Gray Granite   | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper |  |

Hardcoated Surface in lieu of Stainless Steel on Standard 19.5" (495 mm) deep "I" units - please consult factory for other depths

- |  |  |
|--|--|
| <input type="checkbox"/> GRS-18 through GRS-42 | <input type="checkbox"/> GRS-48 through GRS-72 |
|--|--|

### Accessories

- ☐ 4" (102 mm) adjustable Legs (standard on GRS-36 units and larger)
- ☐ Slant Leg Kit for models 12" (305 mm) deep or deeper
- Pan Rail for 19.5" (495 mm) models only
 

<input type="checkbox"/> 2-Pan	<input type="checkbox"/> 3-Pan	<input type="checkbox"/> 4-Pan	<input type="checkbox"/> 5-Pan
--------------------------------	--------------------------------	--------------------------------	--------------------------------

†Non-standard colors are non-returnable




**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

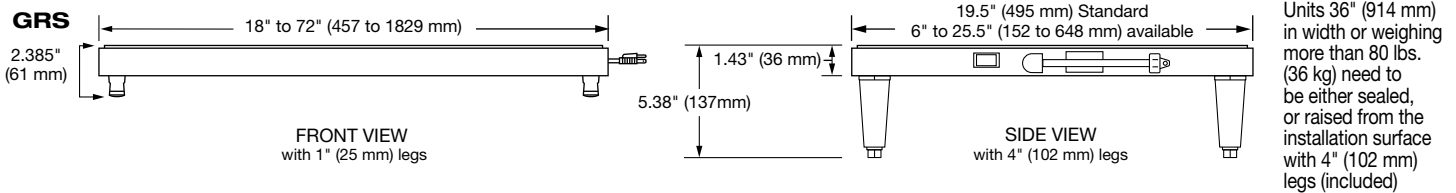

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for international models

### 19.5" (495 mm) DEPTH (I)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-I	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	100	250	2.5	NEMA 5-15P	16 lbs (8 kg)
		120	250	2.1	NEMA 5-15P	
		220	229	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	229-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-24-I	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	100	350	3.5	NEMA 5-15P	20 lbs (10 kg)
		120	350	2.9	NEMA 5-15P	
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5-1.6	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-30-I	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	100	450	4.5	NEMA 5-15P	25 lbs (12 kg)
		120	450	3.8	NEMA 5-15P	
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-36-I*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	100	550	5.5	NEMA 5-15P	28 lbs (13 kg)
		120	550	4.6	NEMA 5-15P	
		220	503	2.3	CEE 7/7 Schuko	
		240	599	2.5	BS-1363	
		220-230 (CE)	503-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-599	2.4-2.5	BS-1363	
GRS-42-I*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	100	600	6.0	NEMA 5-15P	32 lbs (15 kg)
		120	600	5.0	NEMA 5-15P	
		220	549	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	549-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	

### 19.5" (495 mm) DEPTH (I)

Model	Dimensions W x H (height includes legs)	Voltages Single phase	Watts	Amps	Plug	Ship Weight*
GRS-48-I*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	100	700	7.0	NEMA 5-15P	36 lbs (17 kg)
		120	700	5.8	NEMA 5-15P	
		220	640	2.9	CEE 7/7 Schuko	
		240	762	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-762	3.0-3.2	BS-1363	
GRS-54-I*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	100	800	8.0	NEMA 5-15P	42 lbs. (20 kg)
		120	800	6.7	NEMA 5-15P	
		220	732	3.3	CEE 7/7 Schuko	
		240	871	3.6	BS-1363	
		220-230 (CE)	732-800	3.3-3.5	CEE 7/7 Schuko	
		220-240 (CE)	800-871	3.5-3.6	BS-1363	
GRS-60-I*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	100	900	9.0	NEMA 5-15P	44 lbs. (20 kg)
		120	900	7.5	NEMA 5-15P	
		220	823	3.7	CEE 7/7 Schuko	
		240	980	4.1	BS-1363	
		220-230 (CE)	823-900	3.7-3.9	CEE 7/7 Schuko	
		220-240 (CE)	900-980	3.9-4.1	BS-1363	
GRS-66-I*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	100	1000	10.0	NEMA 5-15P	50 lbs (23 kg)
		120	1000	8.3	NEMA 5-15P	
		220	915	4.2	CEE 7/7 Schuko	
		240	1089	4.5	BS-1363	
		220-230 (CE)	915-1000	4.2-4.3	CEE 7/7 Schuko	
		230-240 (CE)	1000-1089	4.3-4.5	BS-1363	
GRS-72-I*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	100	1100	11.0	NEMA 5-15P	56 lbs (26 kg)
		120	1100	9.2	NEMA 5-15P	
		220	1006	4.6	CEE 7/7 Schuko	
		240	1198	5.0	BS-1363	
		220-230 (CE)	1006-1100	4.6-4.8	CEE 7/7 Schuko	
		230-240 (CE)	1100-1198	4.8-5.0	BS-1363	

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

\* Shipping weight includes packaging.

## Pan Capacity

Accommodates 12" x 20" (305 x 508 mm) steam table pans

Model	Capacity	Model	Capacity
GRS-18-I	1 pan	GRS-48-I	3 pans
GRS-24-I	1 pan	GRS-54-I	4 pans
GRS-30-I	2 pans	GRS-60-I	4 pans
GRS-36-I	2 pans	GRS-66-I	5 pans
GRS-42-I	3 pans	GRS-72-I	5 pans

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

### 6" (152 mm) DEPTH (A)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-A	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	100	0.8	NEMA 5-15P	10 lbs (5 kg)
		220	91	0.4	CEE 7/7 Schuko	
		240	109	0.5	BS-1363	
		220-230 (CE)	91-100	0.4	CEE 7/7 Schuko	
		230-240 (CE)	100-109	0.4-0.5	BS-1363	
GRS-24-A	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	125	1.0	NEMA 5-15P	11 lbs (5 kg)
		220	114	0.5	CEE 7/7 Schuko	
		240	136	0.6	BS-1363	
		220-230 (CE)	114-125	0.5	CEE 7/7 Schuko	
		230-240 (CE)	125-136	0.5-0.6	BS-1363	
GRS-30-A	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	150	1.3	NEMA 5-15P	9 lbs (5 kg)
		220	137	0.6	CEE 7/7 Schuko	
		240	163	0.7	BS-1363	
		220-230 (CE)	137-150	0.6-0.7	CEE 7/7 Schuko	
		230-240 (CE)	150-163	0.7	BS-1363	
GRS-36-A*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	175	1.5	NEMA 5-15P	11 lbs (5 kg)
		220	160	0.7	CEE 7/7 Schuko	
		240	191	0.8	BS-1363	
		220-230 (CE)	160-175	0.7-0.8	CEE 7/7 Schuko	
		230-240 (CE)	175-191	0.8	BS-1363	
GRS-42-A*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	225	1.9	NEMA 5-15P	15 lbs (7 kg)
		220	205	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	205-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-48-A*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	250	2.1	NEMA 5-15P	16 lbs (8 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-54-A*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	275	2.3	NEMA 5-15P	17 lbs (8 kg)
		220	251	1.1	CEE 7/7 Schuko	
		240	299	1.2	BS-1363	
		220-230 (CE)	251-275	1.1-1.2	CEE 7/7 Schuko	
		230-240 (CE)	275-299	1.2	BS-1363	
GRS-60-A*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-66-A*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	325	2.7	NEMA 5-15P	20 lbs (9 kg)
		220	297	1.4	CEE 7/7 Schuko	
		240	354	1.5	BS-1363	
		220-230 (CE)	297-325	1.4	CEE 7/7 Schuko	
		230-240 (CE)	325-354	1.4-1.5	BS-1363	
GRS-72-A*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	

### 7.75" (197 mm) DEPTH (B)

Model	Dimensions W x H (height includes legs)	Voltages Single phase	Watts	Amps	Plug	Ship Weight*
GRS-18-B	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	100	0.8	NEMA 5-15P	10 lbs (5 kg)
		220	91	0.4	CEE 7/7 Schuko	
		240	109	0.5	BS-1363	
		220-230 (CE)	91-100	0.4	CEE 7/7 Schuko	
		230-240 (CE)	100-109	0.4-0.5	BS-1363	
GRS-24-B	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	125	1.0	NEMA 5-15P	10 lbs (5 kg)
		220	114	0.5	CEE 7/7 Schuko	
		240	136	0.6	BS-1363	
		220-230 (CE)	114-125	0.5	CEE 7/7 Schuko	
		230-240 (CE)	125-136	0.5-0.6	BS-1363	
GRS-30-B	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	150	1.3	NEMA 5-15P	12 lbs (6 kg)
		220	137	0.6	CEE 7/7 Schuko	
		240	163	0.7	BS-1363	
		220-230 (CE)	137-150	0.6-0.7	CEE 7/7 Schuko	
		230-240 (CE)	150-163	0.7	BS-1363	
GRS-36-B*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	175	1.5	NEMA 5-15P	14 lbs (7 kg)
		220	160	0.7	CEE 7/7 Schuko	
		240	191	0.8	BS-1363	
		220-230 (CE)	160-175	0.7-0.8	CEE 7/7 Schuko	
		230-240 (CE)	175-191	0.8	BS-1363	
GRS-42-B*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	225	1.9	NEMA 5-15P	17 lbs (8 kg)
		220	205	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	205-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-48-B*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	250	2.1	NEMA 5-15P	19 lbs (9 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-54-B*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	275	2.3	NEMA 5-15P	20 lbs (10 kg)
		220	251	1.1	CEE 7/7 Schuko	
		240	299	1.2	BS-1363	
		220-230 (CE)	251-275	1.1-1.2	CEE 7/7 Schuko	
		230-240 (CE)	275-299	1.2	BS-1363	
GRS-60-B*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	300	2.5	NEMA 5-15P	21 lbs (10 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-66-B*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	325	2.7	NEMA 5-15P	23 lbs (11 kg)
		220	297	1.4	CEE 7/7 Schuko	
		240	354	1.5	BS-1363	
		220-230 (CE)	297-325	1.4	CEE 7/7 Schuko	
		230-240 (CE)	325-354	1.4-1.5	BS-1363	
GRS-72-B*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	350	2.9	NEMA 5-15P	25 lbs (12 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.  
\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

### 9.75" (248 mm) DEPTH (C)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-C	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	125	1.0	NEMA 5-15P	12 lbs (6 kg)
		220	114	0.5	CEE 7/7 Schuko	
		240	136	0.6	BS-1363	
		220-230 (CE)	114-125	0.5	CEE 7/7 Schuko	
		230-240 (CE)	125-136	0.5-0.6	BS-1363	
GRS-24-C	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	175	1.5	NEMA 5-15P	13 lbs (6 kg)
		220	160	0.7	CEE 7/7 Schuko	
		240	191	0.8	BS-1363	
		220-230 (CE)	160-175	0.7-0.8	CEE 7/7 Schuko	
		230-240 (CE)	175-191	0.8	BS-1363	
GRS-30-C	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	225	1.9	NEMA 5-15P	14 lbs (7 kg)
		220	206	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	206-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-36-C*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	275	2.3	NEMA 5-15P	16 lbs (8 kg)
		220	252	1.1	CEE 7/7 Schuko	
		240	299	1.2	BS-1363	
		220-230 (CE)	252-275	1.1-1.2	CEE 7/7 Schuko	
		230-240 (CE)	275-299	1.2	BS-1363	
GRS-42-C*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-48-C*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	350	2.9	NEMA 5-15P	20 lbs (9 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-54-C*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	400	3.3	NEMA 5-15P	22 lbs (10 kg)
		220	366	1.7	CEE 7/7 Schuko	
		240	436	1.8	BS-1363	
		220-230 (CE)	366-400	1.7	CEE 7/7 Schuko	
		230-240 (CE)	400-436	1.7-1.8	BS-1363	
GRS-60-C*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	450	3.8	NEMA 5-15P	25 lbs (12 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-66-C*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	500	4.2	NEMA 5-15P	26 lbs (12 kg)
		220	458	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	458-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-72-C*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	550	4.6	NEMA 5-15P	28 lbs (13 kg)
		220	504	2.3	CEE 7/7 Schuko	
		240	599	2.5	BS-1363	
		220-230 (CE)	504-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-599	2.4-2.5	BS-1363	

### 12" (305 mm) DEPTH (D)

Model	Dimensions W x H (height includes legs)	Voltages Single phase	Watts	Amps	Plug	Ship Weight*
GRS-18-D	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	200	1.7	NEMA 5-15P	12 lbs (6 kg)
		220	183	0.8	CEE 7/7 Schuko	
		240	218	0.9	BS-1363	
		220-230 (CE)	183-200	0.8-0.9	CEE 7/7 Schuko	
		230-240 (CE)	200-218	0.9	BS-1363	
GRS-24-D	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	250	2.1	NEMA 5-15P	15 lbs (7 kg)
		220	229	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	229-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-30-D	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	300	2.5	NEMA 5-15P	17 lbs (8 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-36-D*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	350	2.9	NEMA 5-15P	20 lbs (9 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-42-D*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	450	3.8	NEMA 5-15P	23 lbs (11 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-48-D*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	500	4.2	NEMA 5-15P	26 lbs (12 kg)
		220	457	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	457-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-54-D*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	550	4.6	NEMA 5-15P	30 lbs (14 kg)
		220	503	2.3	CEE 7/7 Schuko	
		240	599	2.5	BS-1363	
		220-230 (CE)	503-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-599	2.4-2.5	BS-1363	
GRS-60-D*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	600	5.0	NEMA 5-15P	34 lbs (16 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-66-D*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	650	5.4	NEMA 5-15P	36 lbs (17 kg)
		220	594	2.7	CEE 7/7 Schuko	
		240	708	3.0	BS-1363	
		220-230 (CE)	594-650	2.7-2.8	CEE 7/7 Schuko	
		230-240 (CE)	650-708	2.8-3.0	BS-1363	
GRS-72-D*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	700	5.8	NEMA 5-15P	37 lbs (17 kg)
		220	640	2.9	CEE 7/7 Schuko	
		240	762	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-762	3.0-3.2	BS-1363	

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

### 13.75" (349 mm) DEPTH (E)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-E	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	200	1.7	NEMA 5-15P	13 lbs (6 kg)
		220	183	0.8	CEE 7/7 Schuko	
		240	218	0.9	BS-1363	
		220-230 (CE)	183-200	0.8-0.9	CEE 7/7 Schuko	
		230-240 (CE)	200-218	0.9	BS-1363	
GRS-24-E	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	250	2.1	NEMA 5-15P	14 lbs (7 kg)
		220	229	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	229-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-30-E	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-36-E*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-42-E*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	450	3.8	NEMA 5-15P	26 lbs (12 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0-2.1	BS-1363	
GRS-48-E*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	500	4.2	NEMA 5-15P	29 lbs (14 kg)
		220	457	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	457-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-54-E*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	550	4.6	NEMA 5-15P	33 lbs (15 kg)
		220	503	2.3	CEE 7/7 Schuko	
		240	599	2.5	BS-1363	
		220-230 (CE)	503-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-599	2.4-2.5	BS-1363	
GRS-60-E*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	600	5.0	NEMA 5-15P	36 lbs (17 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-66-E*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	650	5.4	NEMA 5-15P	38 lbs (18 kg)
		220	594	2.7	CEE 7/7 Schuko	
		240	708	3.0	BS-1363	
		220-230 (CE)	594-650	2.7-2.8	CEE 7/7 Schuko	
		230-240 (CE)	650-708	2.8-3.0	BS-1363	
GRS-72-E*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	700	5.8	NEMA 5-15P	40 lbs (19 kg)
		220	640	2.9	CEE 7/7 Schuko	
		240	762	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-762	3.0-3.2	BS-1363	

### 15.5" (394 mm) DEPTH (F)

Model	Dimensions W x H (height includes legs)	Voltages Single phase	Watts	Amps	Plug	Ship Weight*
GRS-18-F	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	200	1.7	NEMA 5-15P	16 lbs (7 kg)
		220	183	0.8	CEE 7/7 Schuko	
		240	218	0.9	BS-1363	
		220-230 (CE)	183-200	0.8-0.9	CEE 7/7 Schuko	
		230-240 (CE)	200-218	0.9	BS-1363	
GRS-24-F	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	250	2.1	NEMA 5-15P	17 lbs (8 kg)
		220	229	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	229-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-30-F	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	300	2.5	NEMA 5-15P	22 lbs (10 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-36-F*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	350	2.9	NEMA 5-15P	25 lbs (12 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-42-F*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	450	3.8	NEMA 5-15P	26 lbs (12 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-48-F*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	500	4.2	NEMA 5-15P	32 lbs (15 kg)
		220	457	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	457-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-54-F*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	550	4.6	NEMA 5-15P	38 lbs (18 kg)
		220	503	2.3	CEE 7/7 Schuko	
		240	599	2.5	BS-1363	
		220-230 (CE)	503-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-599	2.4-2.5	BS-1363	
GRS-60-F*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	600	5.0	NEMA 5-15P	39 lbs (18 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-66-F*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	650	5.4	NEMA 5-15P	42 lbs (19 kg)
		220	594	2.7	CEE 7/7 Schuko	
		240	708	3.0	BS-1363	
		220-230 (CE)	594-650	2.7-2.8	CEE 7/7 Schuko	
		230-240 (CE)	650-708	2.8-3.0	BS-1363	
GRS-72-F*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	700	5.8	NEMA 5-15P	46 lbs (21 kg)
		220	640	2.9	CEE 7/7 Schuko	
		240	762	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-762	3.0-3.2	BS-1363	

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

\* Shipping weight includes packaging.

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

### 15.75" (400 mm) DEPTH (G)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-G	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	225	1.9	NEMA 5-15P	16 lbs (7 kg)
		220	206	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	206-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-24-G	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-30-G	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	375	3.1	NEMA 5-15P	21 lbs (10 kg)
		220	343	1.6	CEE 7/7 Schuko	
		240	408	1.7	BS-1363	
		220-230 (CE)	343-375	1.6	CEE 7/7 Schuko	
		230-240 (CE)	375-408	1.6-1.7	BS-1363	
GRS-36-G*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	450	3.8	NEMA 5-15P	27 lbs (13 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-42-G*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	525	4.4	NEMA 5-15P	29 lbs (14 kg)
		220	480	2.2	CEE 7/7 Schuko	
		240	572	2.4	BS-1363	
		220-230 (CE)	480-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	525-572	2.3-2.4	BS-1363	
GRS-48-G*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	600	5.0	NEMA 5-15P	33 lbs (15 kg)
		220	549	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	549-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-54-G*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	675	5.6	NEMA 5-15P	38 lbs (18 kg)
		220	618	2.8	CEE 7/7 Schuko	
		240	735	3.1	BS-1363	
		220-230 (CE)	618-675	2.8-2.9	CEE 7/7 Schuko	
		230-240 (CE)	675-735	2.9-3.1	BS-1363	
GRS-60-G*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	750	6.3	NEMA 5-15P	42 lbs (19 kg)
		220	686	3.1	CEE 7/7 Schuko	
		240	817	3.4	BS-1363	
		220-230 (CE)	686-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	750-817	3.3-3.4	BS-1363	
GRS-66-G*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	825	6.9	NEMA 5-15P	45 lbs (21 kg)
		220	755	3.4	CEE 7/7 Schuko	
		240	898	3.7	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-898	3.6-3.7	BS-1363	
GRS-72-G*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	900	7.5	NEMA 5-15P	46 lbs (21 kg)
		220	823	3.7	CEE 7/7 Schuko	
		240	980	4.1	BS-1363	
		220-230 (CE)	823-900	3.7-3.9	CEE 7/7 Schuko	
		230-240 (CE)	900-980	3.9-4.1	BS-1363	

### 17.5" (445 mm) DEPTH (H)

Model	Dimensions W x H (height includes legs)	Voltages Single phase	Watts	Amps	Plug	Ship Weight*
GRS-18-H	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	225	1.9	NEMA 5-15P	16 lbs (8 kg)
		220	206	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	206-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-24-H	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-30-H	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	375	3.1	NEMA 5-15P	21 lbs (10 kg)
		220	343	1.6	CEE 7/7 Schuko	
		240	408	1.7	BS-1363	
		220-230 (CE)	343-375	1.6	CEE 7/7 Schuko	
		230-240 (CE)	375-408	1.6-1.7	BS-1363	
GRS-36-H*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	450	3.8	NEMA 5-15P	27 lbs (13 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-42-H*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	525	4.4	NEMA 5-15P	32 lbs (15 kg)
		220	480	2.2	CEE 7/7 Schuko	
		240	572	2.4	BS-1363	
		220-230 (CE)	480-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	525-572	2.3-2.4	BS-1363	
GRS-48-H*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	600	5.0	NEMA 5-15P	35 lbs (16 kg)
		220	549	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	549-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-54-H*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	675	5.6	NEMA 5-15P	40 lbs (19 kg)
		220	618	2.8	CEE 7/7 Schuko	
		240	735	3.1	BS-1363	
		220-230 (CE)	618-675	2.8-2.9	CEE 7/7 Schuko	
		230-240 (CE)	675-735	2.9-3.1	BS-1363	
GRS-60-H*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	750	6.3	NEMA 5-15P	44 lbs (20 kg)
		220	686	3.1	CEE 7/7 Schuko	
		240	817	3.4	BS-1363	
		220-230 (CE)	686-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	750-817	3.3-3.4	BS-1363	
GRS-66-H*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	825	6.9	NEMA 5-15P	49 lbs (23 kg)
		220	755	3.4	CEE 7/7 Schuko	
		240	898	3.7	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-898	3.6-3.7	BS-1363	
GRS-72-H*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	900	7.5	NEMA 5-15P	50 lbs (23 kg)
		220	823	3.7	CEE 7/7 Schuko	
		240	980	4.1	BS-1363	
		220-230 (CE)	823-900	3.7-3.9	CEE 7/7 Schuko	
		230-240 (CE)	900-980	3.9-4.1	BS-1363	

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | intl@hatcocorp.com



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

21.5" (546 mm) DEPTH (J)							23.5" (597 mm) DEPTH (K)						
Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*	Model	Dimensions W x H (height includes legs)	Voltages Single phase	Watts	Amps	Plug	Ship Weight*
GRS-18-J	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	300	2.5	NEMA 5-15P	19 lbs (9 kg)	GRS-18-K	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	325	2.7	NEMA 5-15P	21 lbs (10 kg)
		220	274	1.2	CEE 7/7 Schuko				220	297	1.4	CEE 7/7 Schuko	
		240	327	1.4	BS-1363				240	354	1.5	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko				220-230 (CE)	297-325	1.4	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363				230-240 (CE)	325-354	1.4-1.5	BS-1363	
GRS-24-J	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	375	3.1	NEMA 5-15P	24 lbs (11 kg)	GRS-24-K	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	425	3.5	NEMA 5-15P	27 lbs (13 kg)
		220	343	1.6	CEE 7/7 Schuko				220	389	1.8	CEE 7/7 Schuko	
		240	408	1.7	BS-1363				240	463	1.9	BS-1363	
		220-230 (CE)	343-375	1.6	CEE 7/7 Schuko				220-230 (CE)	389-425	1.8	CEE 7/7 Schuko	
		230-240 (CE)	375-408	1.6-1.7	BS-1363				230-240 (CE)	425-463	1.8-1.9	BS-1363	
GRS-30-J	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	450	3.8	NEMA 5-15P	30 lbs (14 kg)	GRS-30-K	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	525	4.4	NEMA 5-15P	33 lbs (15 kg)
		220	412	1.9	CEE 7/7 Schuko				220	480	2.2	CEE 7/7 Schuko	
		240	490	2.0	BS-1363				240	572	2.4	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko				220-230 (CE)	480-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363				230-240 (CE)	525-572	2.3-2.4	BS-1363	
GRS-36-J*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	525	4.4	NEMA 5-15P	33 lbs (15 kg)	GRS-36-K*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	625	5.2	NEMA 5-15P	36 lbs (17 kg)
		220	480	2.2	CEE 7/7 Schuko				220	572	2.6	CEE 7/7 Schuko	
		240	572	2.4	BS-1363				240	681	2.8	BS-1363	
		220-230 (CE)	480-525	2.2-2.3	CEE 7/7 Schuko				220-230 (CE)	572-625	2.6-2.7	CEE 7/7 Schuko	
		230-240 (CE)	525-572	2.3-2.4	BS-1363				230-240 (CE)	625-681	2.7-2.8	BS-1363	
GRS-42-J*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	675	5.6	NEMA 5-15P	39 lbs (18 kg)	GRS-42-K*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	750	6.3	NEMA 5-15P	43 lbs (20 kg)
		220	618	2.8	CEE 7/7 Schuko				220	686	3.1	CEE 7/7 Schuko	
		240	735	3.1	BS-1363				240	817	3.4	BS-1363	
		220-230 (CE)	618-675	2.8-2.9	CEE 7/7 Schuko				220-230 (CE)	686-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	675-735	2.9-3.1	BS-1363				230-240 (CE)	750-817	3.3-3.4	BS-1363	
GRS-48-J*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	750	6.3	NEMA 5-15P	45 lbs (21 kg)	GRS-48-K*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	850	7.1	NEMA 5-15P	48 lbs (22 kg)
		220	686	3.1	CEE 7/7 Schuko				220	778	3.5	CEE 7/7 Schuko	
		240	817	3.4	BS-1363				240	925	3.9	BS-1363	
		220-230 (CE)	686-750	3.1-3.3	CEE 7/7 Schuko				220-230 (CE)	778-850	3.5-3.7	CEE 7/7 Schuko	
		230-240 (CE)	750-817	3.3-3.4	BS-1363				230-240 (CE)	850-925	3.7-3.9	BS-1363	
GRS-54-J*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	825	6.9	NEMA 5-15P	49 lbs (23 kg)	GRS-54-K*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	950	7.9	NEMA 5-15P	52 lbs (24 kg)
		220	755	3.4	CEE 7/7 Schuko				220	869	4.0	CEE 7/7 Schuko	
		240	898	3.7	BS-1363				240	1034	4.3	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko				220-230 (CE)	869-950	4.0-4.1	CEE 7/7 Schuko	
		230-240 (CE)	825-898	3.6-3.7	BS-1363				230-240 (CE)	950-1034	4.1-4.3	BS-1363	
GRS-60-J*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	900	7.5	NEMA 5-15P	53 lbs (24 kg)	GRS-60-K*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	1050	8.8	NEMA 5-15P	56 lbs (26 kg)
		220	823	3.7	CEE 7/7 Schuko				220	961	4.4	CEE 7/7 Schuko	
		240	980	4.1	BS-1363				240	1143	4.8	BS-1363	
		220-230 (CE)	823-900	3.7-3.9	CEE 7/7 Schuko				220-230 (CE)	961-1050	4.4-4.6	CEE 7/7 Schuko	
		230-240 (CE)	900-980	3.9-4.1	BS-1363				230-240 (CE)	1050-1143	4.6-4.8	BS-1363	
GRS-66-J*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	975	8.1	NEMA 5-15P	60 lbs (28 kg)	GRS-66-K*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	1150	9.6	NEMA 5-15P	68 lbs (31 kg)
		220	892	4.1	CEE 7/7 Schuko				220	1052	4.8	CEE 7/7 Schuko	
		240	1062	4.4	BS-1363				240	1252	5.2	BS-1363	
		220-230 (CE)	892-975	4.1-4.2	CEE 7/7 Schuko				220-230 (CE)	1052-1150	4.8-5.0	CEE 7/7 Schuko	
		230-240 (CE)	975-1062	4.2-4.4	BS-1363				230-240 (CE)	1150-1252	5.0-5.2	BS-1363	
GRS-72-J*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	1050	8.8	NEMA 5-15P	64 lbs (30 kg)	GRS-72-K*	72" x 5.38" (1829 x 133 mm)	120	1250	10.4	NEMA 5-15P	69 lbs (32 kg)
		220	961	4.4	CEE 7/7 Schuko				220	1144	5.2	CEE 7/7 Schuko	
		240	1143	4.8	BS-1363				240	1361	5.7	BS-1363	
		220-230 (CE)	961-1050	4.4-4.6	CEE 7/7 Schuko				220-230 (CE)	1144-1250	5.2-5.4	CEE 7/7 Schuko	
		230-240 (CE)	1050-1143	4.6-4.8	BS-1363				230-240 (CE)	1250-1361	5.4-5.7	BS-1363	

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

\* Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)



# Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models


### 25.5" (648 mm) DEPTH (L)

Model	Dimensions W x H (height includes legs)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight*
GRS-18-L	18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-381	1.5-1.6	BS-1363	
GRS-24-L	24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm)	120	475	4.0	NEMA 5-15P	26 lbs (12 kg)
		220	435	2.0	CEE 7/7 Schuko	
		240	517	2.2	BS-1363	
		220-230 (CE)	435-475	2.0-2.1	CEE 7/7 Schuko	
		230-240 (CE)	475-517	2.1-2.2	BS-1363	
GRS-30-L	30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm)	120	600	5.0	NEMA 5-15P	33 lbs (15 kg)
		220	549	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	549-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-36-L*	36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm)	120	725	6.0	NEMA 5-15P	37 lbs (17 kg)
		220	663	3.0	CEE 7/7 Schuko	
		240	789	3.3	BS-1363	
		220-230 (CE)	663-725	3.0-3.2	CEE 7/7 Schuko	
		230-240 (CE)	725-789	3.2-3.3	BS-1363	
GRS-42-L*	42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm)	120	825	6.9	NEMA 5-15P	43 lbs (20 kg)
		220	755	3.4	CEE 7/7 Schuko	
		240	898	3.7	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-898	3.6-3.7	BS-1363	
GRS-48-L*	48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm)	120	950	7.9	NEMA 5-15P	50 lbs (23 kg)
		220	869	4.0	CEE 7/7 Schuko	
		240	1034	4.3	BS-1363	
		220-230 (CE)	869-950	4.0-4.1	CEE 7/7 Schuko	
		230-240 (CE)	950-1034	4.1-4.3	BS-1363	
GRS-54-L*	54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm)	120	1075	9.0	NEMA 5-15P	58 lbs (27 kg)
		220	984	4.5	CEE 7/7 Schuko	
		240	1171	4.9	BS-1363	
		220-230 (CE)	984-1075	4.5-4.7	CEE 7/7 Schuko	
		230-240 (CE)	1075-1171	4.7-4.9	BS-1363	
GRS-60-L*	60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm)	120	1200	10.0	NEMA 5-15P	60 lbs (28 kg)
		220	1098	5.0	CEE 7/7 Schuko	
		240	1307	5.4	BS-1363	
		220-230 (CE)	1098-1200	5.0-5.2	CEE 7/7 Schuko	
		230-240 (CE)	1200-1307	5.2-5.4	BS-1363	
GRS-66-L*	66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm)	120	1325	11.0	NEMA 5-15P	65 lbs (30 kg)
		220	1212	5.5	CEE 7/7 Schuko	
		240	1443	6.0	BS-1363	
		220-230 (CE)	1212-1325	5.5-5.8	CEE 7/7 Schuko	
		230-240 (CE)	1325-1443	5.8-6.0	BS-1363	
GRS-72-L*	72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm)	120	1450	12.0	NEMA 5-15P	69 lbs (32 kg)
		220	1327	6.0	CEE 7/7 Schuko	
		240	1579	6.6	BS-1363	
		220-230 (CE)	1327-1450	6.0-6.3	CEE 7/7 Schuko	
		230-240 (CE)	1450-1579	6.3-6.6	BS-1363	

## CORD LOCATION

Center of side with controls.

## PLUG CONFIGURATIONS

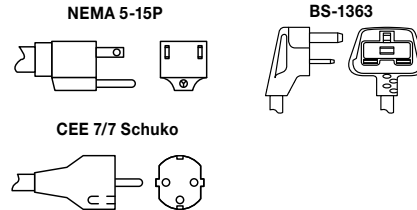

\* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

## PRODUCT SPECS Heated Shelves

The Heated Shelf shall be a Glo-Ray®... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Accessories shall include 4" (102 mm) adjustable legs, slant leg kit and pan rail. Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)