Digital Undercounter 2 Door Freezer Counter -22-15°C -A304-ASIA

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



790307 (HB2FAC3)

2-door freezer table, -22-15° C, AISI 304 - ASIA

Short Form Specification

Item No.

The Electrolux range of refrigerated tables combines the convenience of worktop space with cold storage located below. This versatility allows remarkable savings in space while offering a functional and modular solution to any kitchen requirement. The range comprises of counters with a number of compartments, with built-in compressor unit, in various door or drawer configurations. The model detailed in this sheet has two compartments, two full doors and operates over the temperature range of -22 °C to -15 °C.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Self closing and on site reversible left/right doors.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- Built-in compressor to suit operating conditions.
- High density polyurethane insulation, 60 mm tickness, HCFC free.
- Mounted on 150 mm adjustable feet.
- Rounded internal corners for ease of cleaning.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- CFC and HCFC free.
- Removable magnetic gasket door with hygienic design.

Included Accessories

• 2 of 1x1/1GN PVC grid for counters PNC 880299

Optional Accessories

Lock kit for counters
 PNC 880227

APPROVAL:



Digital Undercounter 2 Door Freezer Counter -22-15°C -A304-ASIA

• Kit integrated HACCP for digital refrigerators (IR33)

• 1x1/1GN PVC grid for counters

• Kit of 5 wheels (front with brake) for cabinets and counters

PNC 880252 □


PNC 880299

PNC 880301





Digital Undercounter 2 Door Freezer Counter -22-15°C -A304-ASIA

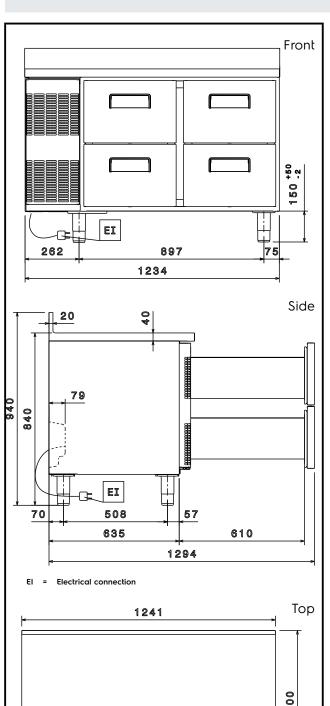

Electric

Supply voltage:

790307 (HB2FAC3) 220-230 V/1N ph/50 Hz

Electrical power, max: 0.7 kW

Key Information:

Gross capacity: 265 lt
Door hinges: 1 Left+1 Right
External dimensions, Width: 1238 mm
External dimensions, Height: 840 mm
External dimensions, Depth: 700 mm

External dimensions, Depth

with Doors Open: 1100 mm

Depth with doors open: 1100 mm

Refrigeration Data

Compressor power: 1 hp
Refrigerant type: R404a
Refrigeration power: 802 W
Refrigerant weight: 230 g
Operating temperature min.: -22 °C
Operating temperature max.: -15 °C



Digital Undercounter 2 Door Freezer Counter -22-15°C - A304-ASIA